



## POWER ANALYZER TESTS OF HYDRA MODEL-8 AND COMPETITOR "X"

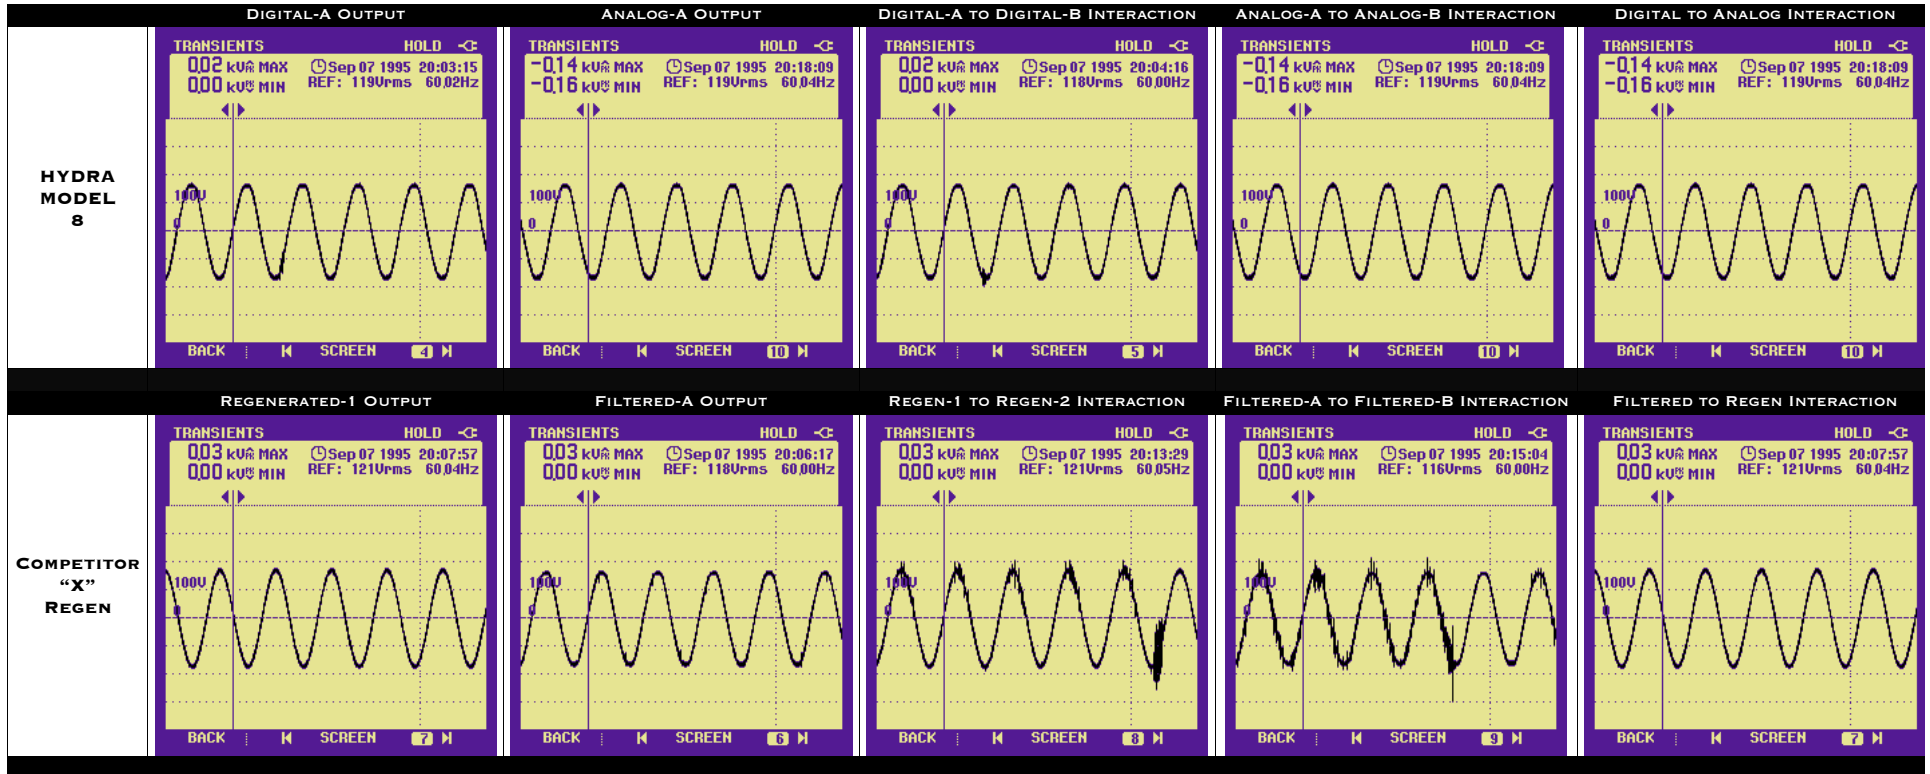

### REFERENCE NOISE INPUT SIGNAL

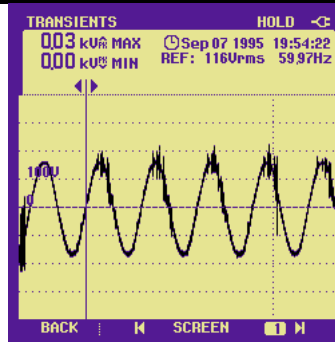

#### NOTE:

All tests were conducted with a Fluke Model 43 Power Quality Analyzer.

Tests were performed in "transient capture mode" with a 20% amplitude variation trigger.

The test noise signal is a combination of broadband noise and transient impulse bursts.

ALL RIGHTS RESERVED – COPYRIGHT SHUNYATA RESEARCH INC.